


### What drives Thunderbox 3.3 kW OCPP AC Charge

Rating	3.3 kW
No of Output / Connector	1
Output Supply	AC
Output Voltage max	220V - 240 V Max
Input Supply	Single Phase 180-300 Volt , 3 wire system L-N-E
Charging Mode	1 & 2
Connector Type	Industrial Socket 16A – 1 Nos (IEC 60309) (IP-67 : Havells/ABB Make)
Maximum Cord length meter	NA
Each vehicle Maximum Input Power	3.3 KW
Installation Type	Wall / Stand (Indoor /Outdoor)
App-based monitoring and tracking	GSM / Wifi
Efficiency	Greater than 99%
Input Supply Power Factor Greater	Greater than 0.98
Ingress protection	IP55
Impact Resistance Protection	IK 10
Communication	OCPP 1.6 J
Compatible to Charge	2,3,4 Wheeler

#### Protection

Over Voltage, Under Voltage, Over Current, Over Temperature, Under Temperature, Short Circuit, Residual Current, Earth Fault, Hardware Fault

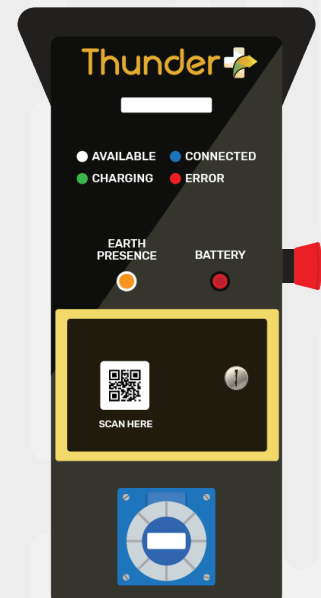

### EASY INSTALLATION. GREAT FEATURES.



Highly economical



Compact and easy installation



Free installation and maintenance



Suits all weather conditions



App-based monitoring and tracking



On-call customer support